

## Oil level sight glasses

### Item description/product images



### Description

#### Material:

Housing in thermoplastic polyamide.  
Plastic reflector.

#### Version:

Housing, transparent, high mechanical stability, non-ageing, temperature resistant with oil up to 90 °C, resistant to solvents but not to alcohol or frost.  
Flat seal, asbestos-free.  
Reflector white.

#### On request:


Rubber gasket (NBR).

#### Drawing reference:

Form A: without reflector  
Form B: with reflector

- 1) flat seal
- 2) check mark
- 3) reflector

### Drawings

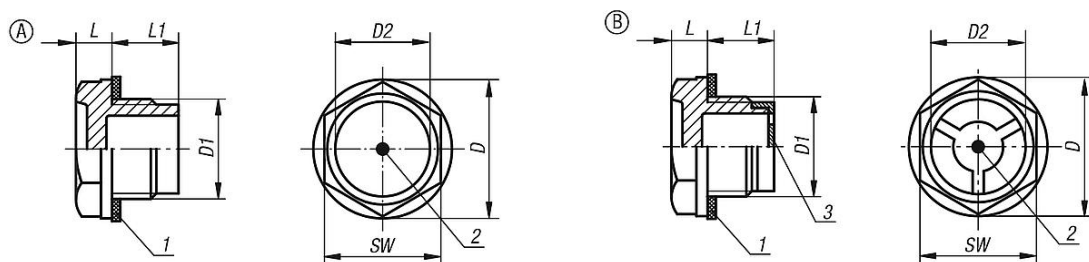

### Overview of items

#### Oil level sight glasses

Order No.	Form	D	D1	D2	L	L1	SW	Tightening torque max. Nm
K0445.120014	A	20	G1/4	15	7	8	17	6
K0445.122038	A	22	G3/8	14	6,5	10,5	18	8
K0445.128012	A	28	G1/2	16	8	11	24	12
K0445.135034	A	35	G3/4	21	8	12	30	16
K0445.143100	A	43	G1	32	11	12	36	-
K0445.151114	A	51	G1 1/4	33	10	16	42	-
K0445.158112	A	58	G1 1/2	40	12	16	50	-
K0445.174200	A	74	G2	48	12	22	64	-
K0445.1201415	A	20	M14X1,5	15	7	8	17	7
K0445.1221615	A	22	M16X1,5	14	6,5	10	18	8
K0445.1251815	A	25	M18X1,5	16	7	10,5	21	10
K0445.1282015	A	28	M20X1,5	18	7,5	11	24	16
K0445.1282215	A	28	M22X1,5	16	7,5	12,5	24	12
K0445.1362615	A	36	M26X1,5	21	8,5	13,5	30	21
K0445.1362715	A	36	M27X1,5	21	8,5	13,5	30	21
K0445.1514015	A	51	M40X1,5	32	10	17	42	-

## Oil level sight glasses

### Overview of items

Order No.	Form	D	D1	D2	L	L1	SW	Tightening torque max. Nm
K0445.222038	B	22	G3/8	14	6,5	10,5	18	8
K0445.228012	B	28	G1/2	16	8	11	24	12
K0445.235034	B	35	G3/4	21	8	12	30	16
K0445.243100	B	43	G1	32	11	12	36	-
K0445.251114	B	51	G1 1/4	33	10	16	42	-
K0445.258112	B	58	G1 1/2	40	12	16	50	-
K0445.274200	B	74	G2	48	12	22	64	-
K0445.2221615	B	22	M16X1,5	14	6,5	10	18	8
K0445.2251815	B	25	M18X1,5	16	7	10,5	21	10
K0445.2282015	B	28	M20X1,5	18	7,5	11	24	16
K0445.2282215	B	28	M22X1,5	16	7,5	12,5	24	12
K0445.2362615	B	36	M26X1,5	21	8,5	13,5	30	21
K0445.2362715	B	36	M27X1,5	21	8,5	13,5	30	21
K0445.2514015	B	51	M40X1,5	32	10	17	42	-