

Levelling feet threaded spindles steel or stainless steel

Item description/product images



Description

Material:

Steel or 1.4305 stainless steel

Version:

Steel trivalent blue passivated.

Stainless steel, bright.


Note:

Levelling feet consist of a plate and a threaded spindle. Any plate can be combined with any threaded spindle.

The height of the complete levelling foot is calculated from the length of the threaded spindle + 30 mm.

(Total height of levelling foot = L + 30 mm)

Drawings

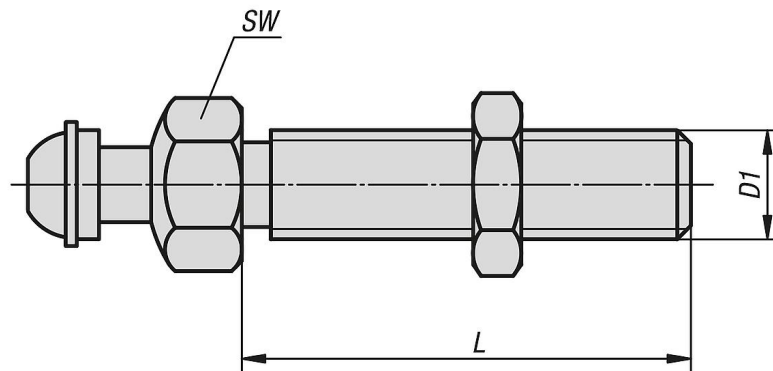

Overview of items

Levelling feet threaded spindles steel or stainless steel

| Order No. | Main material | D1 | L | SW | Load rating max. kN |
|--------------|-----------------|-----|-----|----|---------------------|
| K0427.120661 | steel | M12 | 66 | 22 | 7,7 |
| K0427.121001 | steel | M12 | 100 | 22 | 7,7 |
| K0427.121251 | steel | M12 | 125 | 22 | 7,7 |
| K0427.121501 | steel | M12 | 150 | 22 | 7,7 |
| K0427.160661 | steel | M16 | 66 | 22 | 14,5 |
| K0427.161001 | steel | M16 | 100 | 22 | 14,5 |
| K0427.161251 | steel | M16 | 125 | 22 | 14,5 |
| K0427.161501 | steel | M16 | 150 | 22 | 14,5 |
| K0427.162001 | steel | M16 | 200 | 22 | 14,5 |
| K0427.201001 | steel | M20 | 100 | 22 | 24,3 |
| K0427.201251 | steel | M20 | 125 | 22 | 24,3 |
| K0427.201501 | steel | M20 | 150 | 22 | 24,3 |
| K0427.202001 | steel | M20 | 200 | 22 | 24,3 |
| K0427.120662 | stainless steel | M12 | 66 | 22 | 7,7 |
| K0427.121002 | stainless steel | M12 | 100 | 22 | 7,7 |
| K0427.121252 | stainless steel | M12 | 125 | 22 | 7,7 |
| K0427.121502 | stainless steel | M12 | 150 | 22 | 7,7 |
| K0427.160662 | stainless steel | M16 | 66 | 22 | 14,5 |
| K0427.161002 | stainless steel | M16 | 100 | 22 | 14,5 |

Levelling feet threaded spindles steel or stainless steel

Overview of items

| Order No. | Main material | D1 | L | SW | Load rating max. kN |
|--------------|-----------------|-----|-----|----|---------------------|
| K0427.161252 | stainless steel | M16 | 125 | 22 | 14,5 |
| K0427.161502 | stainless steel | M16 | 150 | 22 | 14,5 |
| K0427.162002 | stainless steel | M16 | 200 | 22 | 14,5 |
| K0427.201002 | stainless steel | M20 | 100 | 22 | 24,3 |
| K0427.201252 | stainless steel | M20 | 125 | 22 | 24,3 |
| K0427.201502 | stainless steel | M20 | 150 | 22 | 24,3 |
| K0427.202002 | stainless steel | M20 | 200 | 22 | 24,3 |